

## Battery launcher

### SB 201 MS

ultralight device with integrated lithium battery for 12 V batteries



#### Article number ▼

6850655

#### Brand ▼

Unicraft

#### Availability ▼

Small stock amount  
Article available

#### Catalog directory ▼

Workshop and lifting technology » Battery charging and starting devices » Boot device

#### Purchase ▼


Minimum 1 pc(s).



#### Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	450 mm	Gross	3.3 kg	Delivery	Delivery service	DualUse	✘
Width	260 mm	Net	2.5 kg	Content	1 pc(s).	SCIP	n/a
Height	110 mm					SVHC	No

#### Root data ▼

Country of origin	EAN	Custom number	Quantity unit
 Belgium	4036351309369	85044095	pc(s).




Quality -  
Made in Europe

#### Description ▼

- For professional users in repair, bodywork and car electric workshops
- Patented microprocessor control
- Display with error code indication
- Easy handling due to extensive protective functions, e.g. against wrong polarity or overvoltage
- No defect of the internal battery in case of longer discharge
- Four-cell LiFePO4 battery with high safety against self-ignition
- Five times longer life than devices with conventional batteries - approx. 3000 cycles
- 0.5 m long start cable with fully insulated crocodile clips
- Memory Saver function: Used as a power supply unit to maintain the settings of the vehicle electronics when the battery is removed - important function for modern passenger cars in which the battery may only be changed in back-up charging mode in order to maintain the settings of the electronic devices in the vehicle (radio code, seat and driver comfort settings, ....)
- Quality Made in Europe

## Media informations

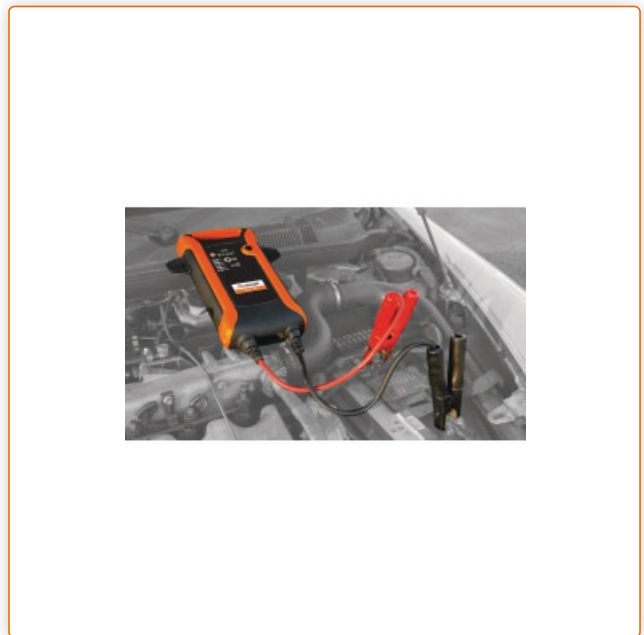

- Simple operation
- Display with error code Display

- Ultralight device
- 0.5 m long starting cable with fully insulated crocodile clips

## Technical data

General features			
Start voltage	12 V	Starting current peak output	2000 A
I-Start	800 A	Degree of protection	IP 32
Dimensions and weights			
Charging cable length	0,5 m	Length (product) approx.	260 mm
Width/depth (product) approx.	135 mm	Height (product) approx.	72 mm
Net weight approx.	2,4 kg		
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Application scope			
Suitable for battery types	Wet, Gel, AGM	Start applications	Krad / Boats / Cars / Kfz / Nfz
Backup charging operation (memory saver)	<input type="checkbox"/>		

## Equipment

Battery voltage display	<input checked="" type="checkbox"/>	Reverse polarity short circuit protection	<input checked="" type="checkbox"/>
Overload protection	<input checked="" type="checkbox"/>	Voltage peak protection	<input checked="" type="checkbox"/>
Protection of vehicle electronics	<input checked="" type="checkbox"/>	Charging cable +/- with professional crocodile clips	<input checked="" type="checkbox"/>
Connecting cable	230 Volt with Schuko plug		

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.