

Sliding table saw

minimax sc 3c 26

Ultra-compact design with tilting saw blade and sliding carriage made of anodised aluminium



Article number ▾

5504326

Brand ▾

Holzkraft

Availability ▾

In stock
Immediate delivery

Catalog directory ▾

Woodworking machinery » Circular saw / Sliding table saws » Sliding table saws » minimax sc 3c




Purchase ▾

Minimum 1 pc(s).

Shipping informations ▾

Packaging Metrics		Weights		Delivery		Other	
Length	950 mm	Gross	385 kg	Delivery	Carrier	DualUse	✘
Width	2,670 mm	Net	385 kg	Content	1 pc(s).	SCIP	n/a
Height	1,240 mm					SVHC	No

Root data ▾

Country of origin	EAN	Custom number	Quantity unit
 Italy	4036351047803	84659120	pc(s).



MADE IN ITALY

Description ▾

- Cutting plane directly on the saw blade
- Heavy cast steel construction
- Smooth-running and precise format sliding carriage made of anodized aluminium with proven and permanently smooth-running ball contact system on hardened, 10-year warranty on wear of the guideways
- Large-surface edging frame guided on telescopic arm and longitudinally adjustable
- Angle-adjustable aluminium telescopic fence with professional stop flaps
- Rip fence with quick clamping and fine adjustment
- Large work table made of milled grey cast iron remains permanently flat
- The standard table widening and table extension make it easy to work with larger workpieces
- Smooth running and precise cuts
- Equipped with a powerful three-phase motor
- The large dimensioned saw unit made of grey cast iron is double mounted on the cast iron table and warrants stability, precision, smooth running and a long service life.
- Maximum cutting height is achieved even with the pre-scoring device installed
- Made in Italy

Significant Features ▼



Media informations ▼



Telescopic stop

- Telescopic fence extendable up to max. 2550 mm
- Angle adjustable
- With professional flip stops



Saw unit guided on two swivel segments

- Large dimensioned, made of steel/cast iron
- Close to saw blade, borne on both sides for precision, smooth action and a long service life
- Height adjustable and pivoting up to 45° through cranks




Rip fence with round bar guide

- With granular adjustment and quick clamping
- Stable rod guide made of polished steel, diameter 45 mm
- Folds up as standard for initial cutting of large workpieces



Aluminium sliding table



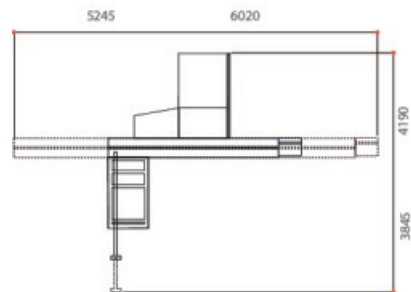




- With ball contact system proven a thousand times over
- Insensitive to dust and dirt due to minimal contact with the floorcontact point between ball and trapezoidal rail
- Ten-year HOLZKRAFT guarantee against wear of the hardened guideways (guarantee conditions under www.stuermer-maschinen.de or to request from Stürmer Maschinen GmbH)



Technical data ▼

Dimensions and weights			
Net weight approx.	385 kg		
Extraction port			
Extraction port diameter bottom	120 mm	Saw blade protection extraction port diameter	60 mm
Footprint			
Transport width	900 mm	Length	1388 mm
Width/depth	689 mm	Space requirement length	5845 mm
Space requiremen width/depth	3830 mm	Explanation about space requirement The dimensions take into account maximum travel distances or usable lengths	
Work area length	1000 mm	Work area width/depth	2000 mm
Explanation about work area	Please add the given dimensions with the required space to obtain the free space recommended for the machine.		
Electrical Data			
Supply voltage	400 V	Mains frequency	50 Hz
Drive motor output	5.0 kW	Duty type drive motor	S6
Duty cycle drive motor	40 %		
Sliding carriage and table			
Sliding carriage length	2600 mm	Sliding carriage width	270 mm
Sliding carriage height	124 mm	Table length	840 mm
Table width	560 mm	Work height	900 mm
Circular saw unit			
Max. cutting width with rip fence	900 mm	Max. cross cut width left from saw blade	2310 mm
Trimming length	2600 mm	Saw blade angle	90 – 45 °
Max. cutting height 90°	100 mm	Max. cutting height 45°	78 mm
(Main) saw blade diameter	315 mm	(Main) saw blade speed	3500 min ⁻¹

Equipment

Anodised aluminium sliding sizing carriage		Handle for sliding carriage	
Claming frame	with angle-adjustable aluminium telescopic stop with two professional folding stops	Saw rip fence	with round rod guide and fine adjustment
Clamp sleigh		Eccentric clamp	
Table broadening		Table lengthening	
Saw blade cover		Height adjustment and tilting of the saw unit	manual

Accessories



Blade guard PSH

Article number ▼
5510404

Availability ▼
No stock available
Information:
Next availability
Expected on
calendar week
19/2024

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Circular saw blade set 315 mm

HOLZKRAFT sizing saw blades comply with the highest quality level especially for industrial applications on stationary machines

Article number ▼
5260315

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Cut-to-size alternating teeth circular saw blade KSB-WZ 315/28

Article number ▼
5263128

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Edging and production cut circular saw blade KSB-BF 315/48

Highest quality level especially for industrial applications on stationary machines

Article number ▼
5263148

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Edging and production cut circular saw blade KSB-BF 315/60

Highest quality level especially for industrial applications on stationary machines

Article number ▼
5263160

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Scoring saw blade VSB 80/12

Article number ▼
5514001

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼





Extraction system connection set 120/58 mm



Article number ▼
5146060

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Additional work table on the sledge



Article number ▼
5510109

Availability ▼
No stock available
Information:
Next availability
Unknown

Purchase ▼
Minimum 1 pc(s).

Price informations ▼
Revoked article



Universal swing hood PSH-U



Article number ▼
5510500

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Mitre fence 1060 mm, with telescopic guide



Article number ▼
5514315

Availability ▼
No stock available
Information:
Next availability
Unknown

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Splitting wedge positively guided for saw blade for saw blade Ø 250 - 350 mm / 2.8 mm riving knife thickness



Article number ▼
5515001

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Extraction system connection set 120/80 mm




Article number ▼
5146080

Availability ▼
No stock available
Information:
Next availability
Expected on
calendar week
13/2024

Purchase ▼
Minimum 1 pc(s).

Price informations ▼

Options equipment ▼



Digital display of the working width at the rip fence PA-DIGI-UNI



Article number ▼

5516000

Availability ▼

In stock
Immediate delivery

Purchase ▼

Minimum 1 pc(s).

Price informations ▼

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.