

Table saw

TKS 200

Fixed do-it-yourself machine with heavy base and maximum cutting depth 60 mm.

Article number ▼

5902020

Brand ▼

Holzstar

Availability ▼

In stock

Immediate delivery

Catalog directory ▼

Woodworking machinery » Circular saw / Sliding table saws » Table Saws

Purchase ▼

Minimum 1 pc(s).



Delivery content ▼

- substructure
- sliding table
- rip fence
- angle stop
- Saw blade guard with suction hose
- table extension
- Saw blade 200 x 30 x 2.8 mm Z18

Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	1,430 mm	Gross	101 kg	Delivery	Carrier	DualUse	✘
Width	1,000 mm	Net	87 kg	Content	1 pc(s).	SCIP	n/a
Height	1,030 mm					SVHC	No

Root data ▼


Country of origin	EAN	Custom number	Quantity unit
 China	4036351250531	84659120	pc(s).

Description ▼


- Large cast iron table
- Table widening as standard
- Saw blade tilt from 90° to -45° to the left, precise, accurate to the degree and conveniently adjustable via handwheel and scale
- Height adjustment of the saw blade via hand wheel
- Stable suspension of the saw unit at the front and rear enables precise cuts
- Powerful motor equipped with thermal overload protection
- Large central suction connection Ø 100 mm
- Saw blade protection hood with suction connection

Media informations




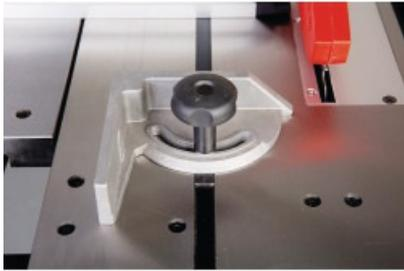

Infinitely adjustable angle stop from -45° to 45°

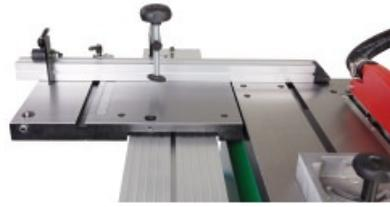

Sliding table with integrated scale. Mitre fence with one folding stop and one hold-down each.



Adjustable folding stop

Technical data

Dimensions and weights			
Length (product) approx.	1430 mm	Width/depth (product) approx.	1000 mm
Height (product) approx.	1030 mm	Net weight approx.	80 kg
Extraction port			
Extraction port diameter bottom	100 mm	Saw blade protection extraction port diameter	30 mm
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Drive motor output	0,75 kW	Absorbed power drive motor	1,1 kW
Total output	1,1 kW	Total rated value	4.6 A
Motor speed	2800 min ⁻¹		

Sliding carriage and table			
Sliding carriage length	400 mm	Sliding carriage width	250 mm
Table length	530 mm	Table width	400 mm
Work height	870 mm		
Noise emission			
Sound pressure level	78.5 dB(A)		
Circular saw unit			
Max. cutting width with rip fence	705 mm	Max. cross cut width left from saw blade	635 mm
Saw blade angle	45 – 90 °	Max. cutting height 90°	60 mm
Max. cutting height 45°	48 mm	(Main) saw blade diameter	200 mm
(Main) saw blade speed	4750 min ⁻¹		

Accessories ▼



Saw blade
200 x 30 x 2.8 mm Z18

Article number ▼ 5912020

Availability ▼ In stock
Immediate delivery

Purchase ▼ Minimum 1 pc(s).

Price informations ▼



Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.